



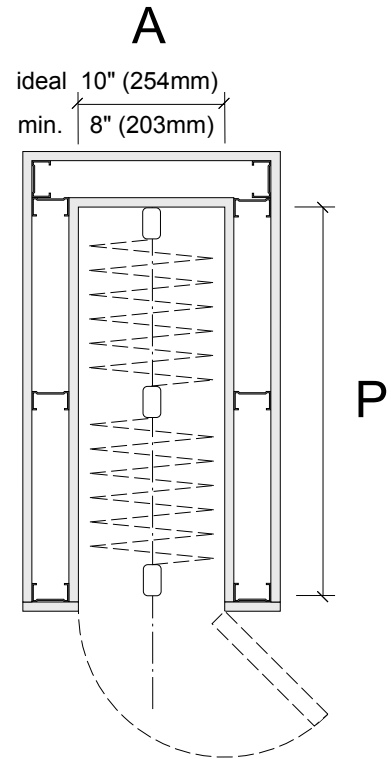

Pocket Requirements

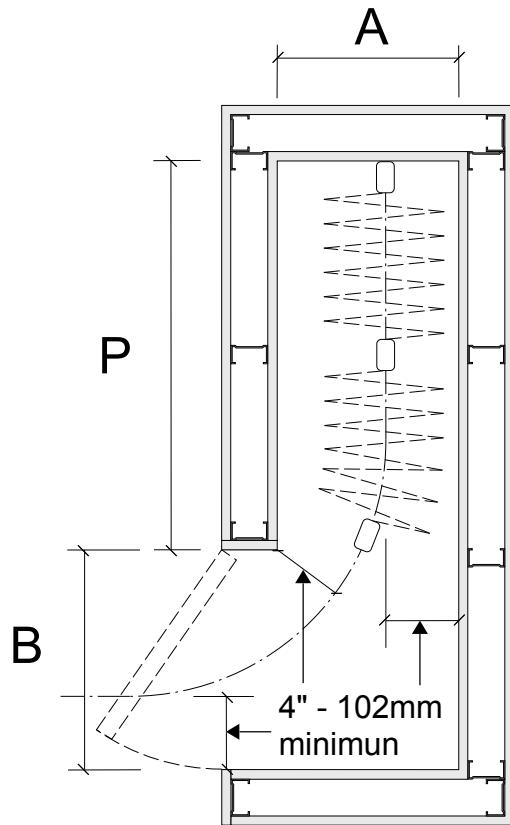

	Radius 14" - 356mm	Radius 10" - 254mm
A	B	B
8" - 203mm	18" - 457mm	14" - 356mm
9" - 229mm	14" - 356mm	11" - 279mm
10" - 254mm	12" - 305mm	10" - 254mm
12" - 305mm	11" - 279mm	9" - 229mm

P (minimum stacking) =

1,15" per linear foot + 3" per post

or

95mm per linear meter
+
76mm per post

A: Interior pocket width, width 10" - 254mm is recommended with a standard 14" - 356mm radius and B at 12" - 305mm

B: Pocket entrance width

4" - 102mm min clearance both sides of track.
If a pocket door is used, the door must not obstruct the entry dimension given.