

Aluminum Counter Shutters & Cabinet Shutters



Easy to work with Very competitive Reliable


Efficient customer service

Delivering a quality product, accurately & timely


Fast, friendly & affordable


nsister






SLIM ROLL-VISION







(Polycarbonate) (Perforated)

(Open style, brick)

(Open style, straight)

COUNTER SHUTTER & SLIM MODELS


Max Curtain size 100sq.ft. - 9,3m²
Max Width 16' - 4,88m or Max Height 12' - 3,66m

Guide installation:

For 8" x 8" (203 x 203mm) end plates:


1- FACE OF WALL

(attached through guide)




2- SURFACE MOUNTED

(between 2 walls)




For 10" x 10" (254 x 254mm) end plates and for Tubular motor:






2- SURFACE MOUNTED

(between 2 walls)




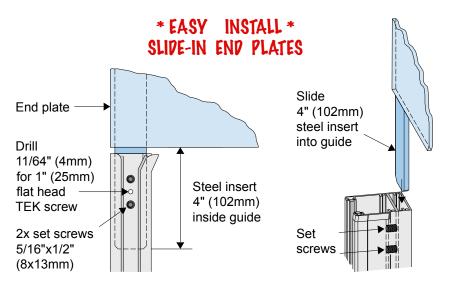

End plate sizes:


For 4 1/2" - 114mm dia Barrel (Manual) & 4" - 102mm dia Barrel (Motorized)

ĺ	CEILING	HEIGHT	END PLATE	
	WITH HOOD	NO HOOD	LNDTLAIL	
ı	up to 6' 1,83m	, 7'	8" x 8"	
ı	up to 1,83m	up to 7,13m	203 x 203mm	
ı	6' , 10'	7' , 12'	10" x 10"	
ı	1,83m ^{to} 3,05m	2,13m to 3,66m	254 x 254mm	

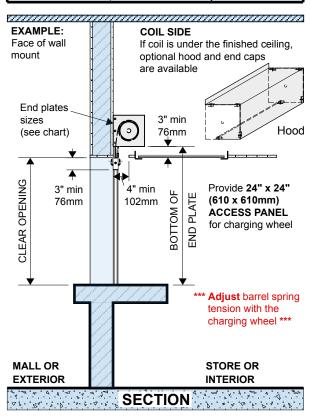

MODEL	lb / sq.ft	kg / m²
SLIM ROLL-VISION	1,33	6,49
SLIM ROLL-AIR	1,52	7,42
SLIM ROLL-FLEX	1,08	5,27
SLIM ROLL-SHUTTER	1,69	8,25
COUNTER SHUTTER	4.00	6,30
CABINET SHUTTER	1,29	


BOTTOM BAR

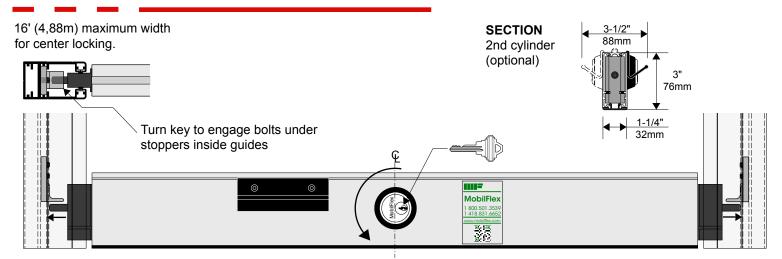

TUBULAR MOTOR


4" - 102mm dia Barrel

COUNTER SHUTTER Operation options

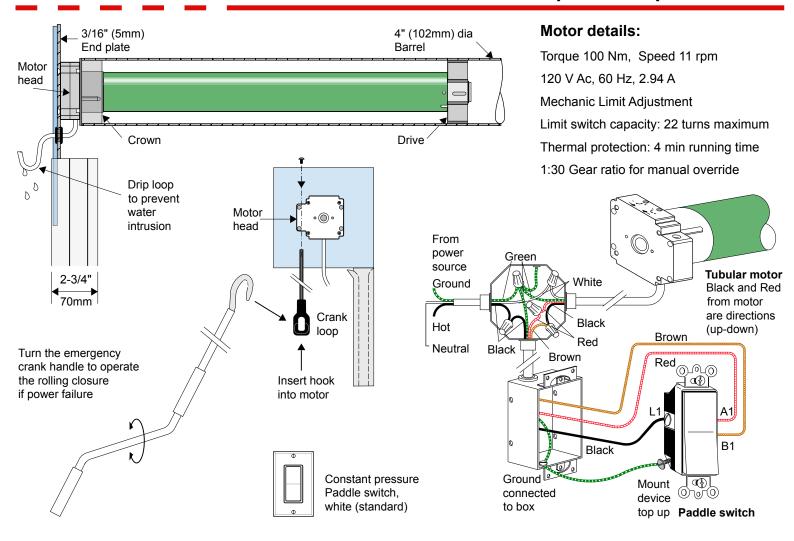

HAND CRANK If shutt

If shutter out of reach

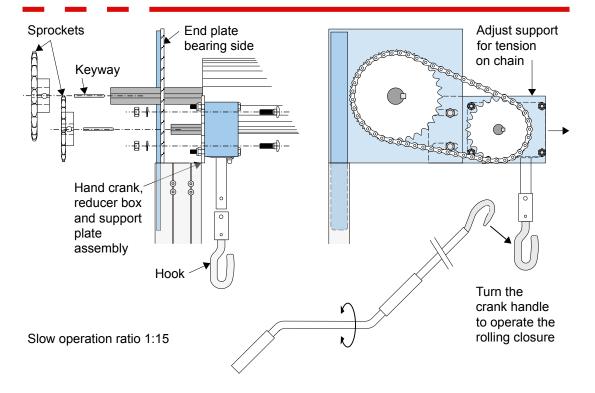


COLORS

Clear Anodized finish only for Counter & Cabinet Shutters

Standard colors for SLIM models:









Special color available at extra cost

CABINET SHUTTER

Max Curtain size 15sq.ft. - 1.4m² Width 24" - 610mm to 72" - 1830mm

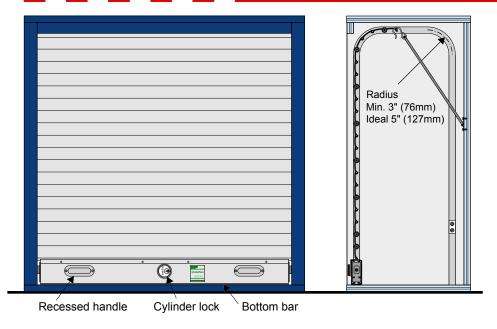





NOTES
MANUAL PUSH-UP


ALUMINUM GUIDES NOT REQUIRED MILLWORK GROOVES & LINING BY OTHERS PROVIDE ACCESS AT BACK OF CABINET FOR INSTALLATION AND SERVICE

ADJUST BUNGEE CORD LENGTH FOR PROPER TENSION

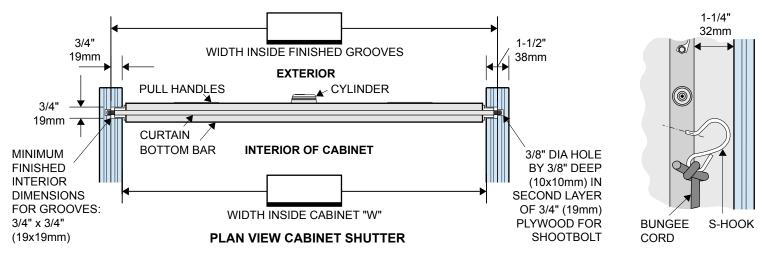



SECTION (BOTTOM OF CURTAIN)

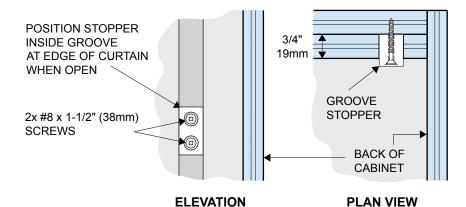

MobilFlex

CANADA

TEL: 1. 800. 501. FLEX (3539)

Web site: www.mobilflex.com

UNITED STATES

TEL: 1. 800. 216. FLEX (3539)

E-mail: flex@mobilflex.com